
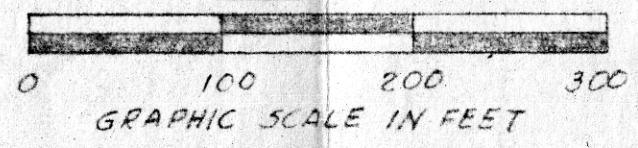


I.P. at S.W. corner NW 1/4 NE 1/4 524, T8N, R7W
 673.70'
 29.75' + 625.55' = 655.30'

Station at S.E. corner NW 1/4 NE 1/4 524, T8N, R7W



This is a resurvey of Vol. 187 Pg. 113.

115520
 RECD. Sept. 15, 1978
 AT 9:58 O'CLOCK A.M.
 RECORDED Sept 15, 1978
 HOLMES CO. Plat VOL. 8 PG. 291
 FEE: \$ 3.²⁰ + .50 Notating
Richard Thaum RECORDED
 Deed 16810X2
 Vol. 187-Pg. 113

Known as part of the N.E. 1/4 of 524, T8N, R7W of Killbuck Twp., Hol. Co., Ohio, and more fully described as follows.

Beginning at a stone at the S.E. corner of the N.W. 1/4 of the N.E. 1/4;
 thence 53°12' W into S.W. 1/4 N.E. 1/4 132.00' to an iron pin;
 thence N86°48' W 132.00' to an iron pin;
 thence N3°12' E 132.00' to the S. line of N.W. 1/4 N.E. 1/4 and passing an iron pin at 127.00';
 thence N86°48' W 523.30' to an iron pin in T.R. 44 and passing an iron pin at 493.55';
 thence N26°4'46\" W with T.R. 44 and leaving said S. line 624.72' to a rail spike;
 thence leaving T.R. 44 N61°14'34\" E 460.38' to an iron pin;
 thence 533°56' E 373.9' to an iron pin;
 thence 551°27' E 199.80' to an iron pin;
 thence 562°38' E 158.50' to an iron pin;
 thence N89°51' E 29.50' to an iron pin on the E. line N.W. 1/4 N.E. 1/4;
 thence 51°53' W 312.00' to the point of beginning, but subject to all legal highways.

10.378 AC. N.W. 1/4 N.E. 1/4
 400 AC. S.W. 1/4 N.E. 1/4
 10.798 AC. total.

PLAT OF A SURVEY FOR GEORGE C. SCHNEIDER

Known as part of N.W. 1/4 and S.W. 1/4 of N.E. 1/4, 524, T8N, R7W of Killbuck Twp., Hol. Co., Ohio
 Robert L. Kasner, P.S. 5193, P.E. 28820.

MAP OFFICE COPY