


126463

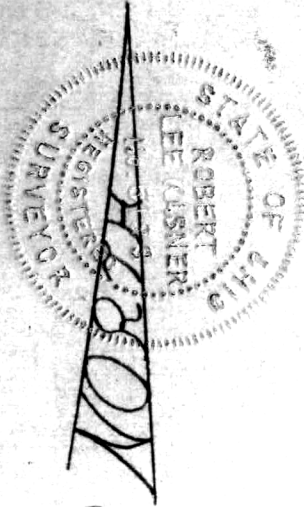

Rec'd. May 22, 1981 AT 1:00 O'CLOCK P.M.
Recorded May 26, 1981 Holmes Co. Ohio Fee: 2.00
Plot Vol. 8 Pg. 744 Recorder Richard Brauer

R.S. at inter-
section S.R. 226 &
C.R. 51 at N.E. crnr
528, T18N, R14W

Mortgage Vol. 128-Pg. 433

I.P.(S) 543.28' S87°0'0"E 524.34'+18.94'

18.94'
I.P.(S)

2.500 Ac. part of V148 P73

N3°0'0"E 200.45'

N87°0'0"E 200.45'

50' wide easement for ingress & egress
543.28'(total)

I.P.(S)

I.P.(F)

630.00' N87°00'45" W

300.00'
I.P.

I.P.(F)
P.B. 7 P. 548

P.B. 7 P. 548

No distance given S. line N.E. 1/4 N.E. 1/4


S.E. crnr V148 P73

P.B. 7 P. 548

5.00 Ac. P.B. 7 P. 548 V. 192 P. 590

N3°0'0"E 330.00'

330.00' E 330.00' W



I.P. P.B. 7 P. 548

S87°00'45"E 630.00'+30.00'

I.P.(F)

I.P. P.B. 7 P. 548

Known as part of N.E. 1/4 N.E. 1/4 528, T18N, R14W of Ripley Twp, Hol. Co, Ohio, and as part of V148 P73.

Beginning at an iron pin found at the S.E. crnr of V148 P73 in C.R. 51 referred to in P87 P548 as S3°0'0"W 1382.70' from N.E. crnr 528; thence with S. line V148 P73 N87°0'45"W 543.28' to an iron pin set; thence leaving S. line V148 P73 N3°0'0"E 200.45' to an iron pin set; thence S87°0'45"E 543.28' to a steel nail set on E. line N.E. 1/4 N.E. 1/4 in C.R. 51 & passing an iron pin set at 524.34'; thence with E. line N.E. 1/4 N.E. 1/4 528 & C.R. 51 S3°0'0"W 200.45' to the point of beginning and containing 2.500 acres, but subject to all legal highways.

This tract is subject to a 50' wide easement for ingress and egress along and parallel to entire Southern side.

N.E. 1/4 N.E. 1/4 528, T18N, R14W
Ripley Twp., Hol. Co., Ohio

Robert L. Kasner, P.S. 5193
3/18/81

MAP OFFICE COPY